




# INDUSTRIAL CHOICE



## INDUSTRIAL CHOICE AQUAFLOW DISCHARGE HOSE

POTABLE WATER NSF APPROVED DRINKING WATER SAFE DISCHARGE HOSE

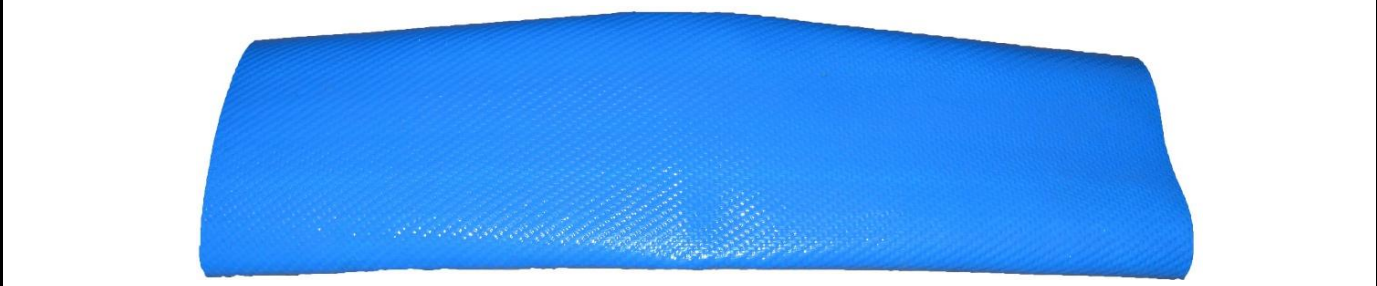

Applications: Potable Water Drinking Water Safe Discharge, Light Water based Chems Chlorine, Alkalizes, Glycols, Brine, Ozone See Chemical Chart -40F to 212F

Item	ID	Wall	WPSI	BPSI	Tensile	Weight	Roll	Notes
<u>Number</u>	<u>(Inch)</u>	<u>Thick</u>			<u>Strength</u>	<u>(lbs./ft.)</u>	<u>Length</u>	
AQUAFLOW-PW-2	1 1/2"	.070	250	750	13,800lbs	0.24	200'	
AQUAFLOW-PW-2.5	2 1/2"	.079	250	750	18,920lbs	0.32	200'	
AQUAFLOW-PW-3	3"	.087	250	750	29,480lbs	0.40	200'	
AQUAFLOW-PW-4	4"	.094	200	600	32,640lbs	0.56	200'	
AQUAFLOW-PW-5	5"	.10	200	600	35,400lbs	0.74	200'	
AQUAFLOW-PW-6	6"	.102	200	600	46,200lbs	0.92	200'	

Note! Dimensions and Weights can vary slightly and are approximate! Wpsi is figured at 78deg F.

Tube: NSF Polyurethane-White

Cover: Polyurethane-Blue

Reinforcement: 2 Ply High Tensile Strength Polyester Spirals

Temperature Range: -40F to +212F

Branded: Industrial Choice AquaFlow NSF Drinking water Safe. 250-200WP

Compare to: