





DESIGNED TO BE BETTER!

URATUFF URETHANE AIR-WATER HOSE FDA/USDA

LIGHT WEIGHT - NON-MARKING - URETHANE COVERED AIR-WATER HOSE

FDA/USDA-DRINKING WATER SAFE & FOOD & BEVERAGE. DESIGNED FOR

FRAMERS, ROOFERS & ANYONE WHO NEEDS A TUFF, DURABLE, LIGHT HOSE






Item Number	ID	OD	WPSI	BPSI	Bend	Weight	Notes
URATUFF-1/4-300BL-600	1/4"	3/8"	300	900	1.5"	.041lb/ft	
URATUFF-3/8-300BL-300	3/8"	9/16"	300	900	2"	.100lb/ft	
URATUFF-1/2-300BL-200	1/2"	3/4"	300	900	3"	.216lb/ft	
URATUFF-1/4-300RD-600	1/4"	3/8"	300	900	1.5"	.041lb/ft	
URATUFF-3/8-300RD-300	3/8"	9/16"	300	900	2"	.100lb/ft	

URATUFF URETHANE-C-AIR-WATER HOSE FDA/USDA



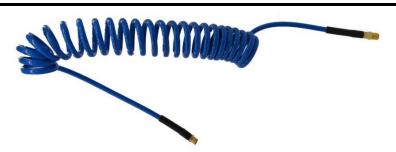



Item	ID	OD	WPSI	BPSI	Bend	Weight	Notes
URATUFF-C-1/4-300BL	1/4"	3/8"	300	900	1.5"	.041lb/ft	
URATUFF-C-3/8-300BL	3/8"	9/16"	300	900	2"	.100lb/ft	
URATUFF-C-1/2-300BL	1/2"	3/4"	300	900	3"	.216lb/ft	
URATUFF-C-1/4-300RD	1/4"	3/8"	300	900	1.5"	.041lb/ft	
URATUFF-C-3/8-300RD	3/8"	9/16"	300	900	2"	.100lb/ft	

Tube: Hybrid Polyurethane.
Cover: Hybrid Polyurethane.

Reinforcement: Multiple Ply Polyester Spirals.

Temperature Range: -25F to +160F

Branded: Industrial Choice URATUFF AIR-WATER-FDA/USDA 300WP

URATUFF GARDEN/WASHDOWN HOSE

LIGHT WIEGHT - NON-MARKING - URETHANE COVERED GARDEN HOSE
DESIGNED FOR ANYONE WHO WANTS A TUFF DURABLE LIGHT WEIGHT HOSE
COUPLED W/HEAVY DUTY LEAD FREE BRASS ENDS, BEND RESTRICTORS.







Offered in 1 Piece Rolls

Item	ID	OD	WPSI	BPSI	Bend	Weight	Notes
<u>Number</u>	(Inch)	(Inch)			Radius	(lbs./ft.)	
URATUFF-C-5/8-200BL	5/8"	.84"	200	600		.290lbs/ft	
URATUFF-C-5/8-200BL	5/8"	.84"	200	600	3"	.216lb/ft	
URATUFF-C-5/8-200BL	5/8"	.84"	200	600		.290lbs/ft	
URATUFF-C-3/4-200BL	3/4"	1.00"	200	600		.340lbs/ft	
URATUFF-C-3/4-200BL	5/8"	.84"	200	600		.340lbs/ft	
URATUFF-C-3/4-200BL	3/4"	1.00"	200	600		.340lbs/ft	

Note! Dimensions and weights can vary slightly and are approximate!

Tube: Hybrid Proprietary Blend Cold Weather PVC/Rubber.

Cover: Hybrid Proprietary Polyurethane Reinforcement: Multiple Ply Polyester Spirals.

Temperature Range: -25F to +160F

Branded: INDUSTRIAL CHOICE URATUFF WASHDOWN & GARDEN 200WP

Note! Dimensions and weights can vary slightly and are approximate!

Note! WPSI & Bend Radius are calculated at 70deg F. As Temperatures go up WPSI goes down & bend radius increases. Approx. a 10deg increase = -10% wpsi & bend radius +10%.

Warning! Ends attached with bands, clamps or sleeves rated for lower than the Wpsi of the hose lowers the Wpsi of the hose assembly.